


CHESTER LATHE

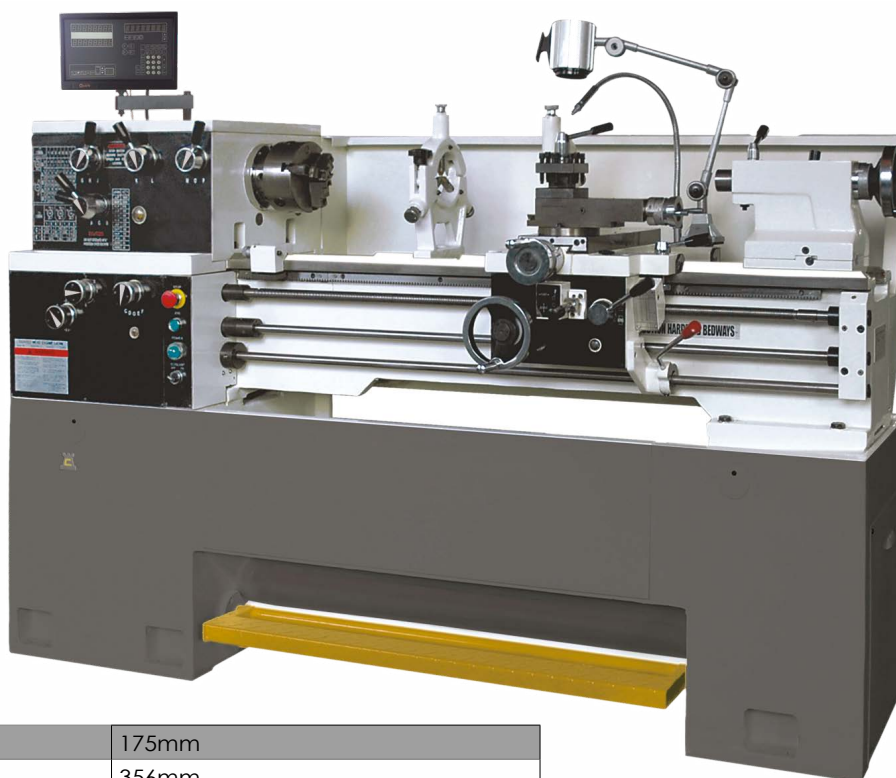

Centre Height	175mm
Swing over Bed	356mm
Distance Between Centres	1000mm
Swing over Carriage	210mm
Swing over Cross Slide	210mm
Swing in Gap	506mm
Gap Length in Front of Face Plate	200mm
Cross Slide Travel	180mm
Top Slide Travel	90mm
Bed	
Width	260mm
Headstock	
Spindle Nose	D1-4
Spindle Bore	40mm
Taper Reduction in Sleeve	MT5
Number of Spindle Speed Ranges	12
Range of Spindle Speeds	40-1800rpm
Tailstock	
Quill Diameter	45mm
Quill Travel	120mm
Quill Internal Taper	MT3
Feeds Range and Gearbox	
Logitudinal Feeds	0.03-0.688mm/rev
Cross Feeds	0.015-0.220mm/rev
Metric Threads	22kinds/(0.45-7.5mm)
Imperial Threads	28kinds/(4-56f.p.i.), 40kinds/(4-112f.p.i.)
Pitch of Leadscrew	4mm
Motors	
Main Motor	2.4kw(3.22hp)
Coolant Pump Motor	0.04kw(0.05hp)
Weight And Dimensions	
Dimensions	1900x710x1170mm
Net Weight	1190kg

FEATURES

- Removable Swarf Tray
- Large Range of Speeds
- Rigid Construction
- Optional Taper Turning Attachment
- Bed Stop

STANDARD ACCESSORIES

- Tool Post Guard
- Chuck Guard
- 3 Jaw Camlock Chuck
- 4 Jaw Camlock Chuck
- Quick Change Tool Post
- Live Centre
- Fixed Steady
- Travelling Steady
- Coolant System
- Work Light
- Camlock Spindle
- Tool Box
- 2 Axis Digital Read Out
- Operation Manual and Complete Parts

OPTIONAL ACCESSORIES

- Taper Turning Attachment
- Soft Jaws for 160mm 3-Jaw Chuck

* The above specifications are subject to change without prior notice, no liability for mistakes. Machines may be shown with optional equipment.