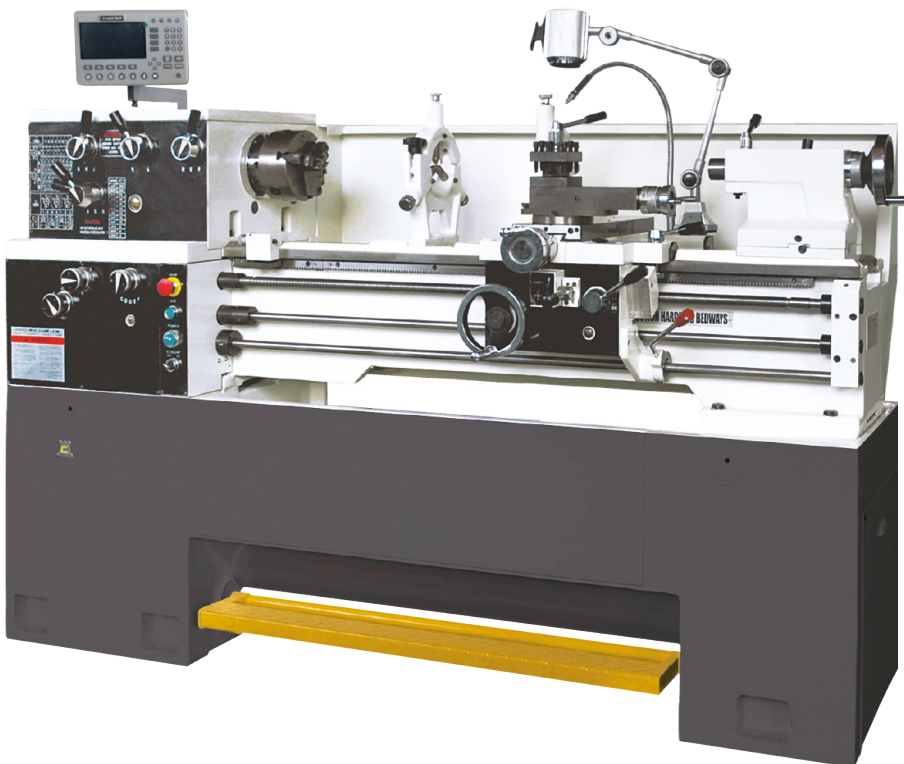


**Features:**

- Removable Swarf Tray
- Large Range of Speeds
- Rigid Construction
- Optional Taper Turning Attachment
- Bed Stop
- Jog Facility

Model	Voyager
Centre Height	178mm
Swing over Bed	356mm
Distance between Centres	1000mm
Swing over Cross Slide	210mm
Swing in Gap	508mm
Gap Length in front of Face Plate	200mm
Cross Slide Travel	180mm
Top Slide Travel	90mm
Bed	
Width	260mm
Max. Weight of Work Piece	100kg
Headstock	
Spindle Nose	D1-4
Spindle Bore	40mm
Spindle Taper	MT5
Number of Spindle Speeds	12
Range of Spindle Speeds	40-1800rpm
Tool Section	16x16mm
Tailstock	
Quill Diameter	45mm
Quill Travel	120mm
Quill Internal Taper	MT3
Feed Ranges and Gearbox	
Longitudinal Feeds	0.03-0.688mm/rev
Cross Feeds	0.015-0.220mm/rev
Metric Threads	0.45-7.5mm (22 steps)
Imperial Threads	4-56tpi (28 steps), 4-112tpi (40 steps)
Leadscrew Pitch	4mm
Motors	
Main Motor	2.2kW (3hp)
Coolant Pump Motor	0.04kW (0.05hp)
Available Power Supply	3 Phase
Weight and Dimensions	
Machine Dimensions	1900 x 710 x 1170mm
Net Weight	1190kg

Standard Accessories:

- 3 Jaw Chuck 200mm
- 4 Jaw Chuck 200mm
- Digital Read Out
- One Piece Cast Iron Base
- LED Machine Lamp
- Chuck Guard
- Toolpost Guard
- Leadscrew Guard
- Fixed Steady
- Travelling Steady
- Full Length Rear Splash Guard
- Coolant System
- Foot Brake
- Four Way Tool Post
- Thread Chasing Dial
- Single Position Micrometer Bed Stop
- Reducing Sleeve
- Steel Centre
- Tool Box
- Operation Manual

Optional Accessories:

- Soft Jaws
- Quick Change Tool Post with Tool Holders
- Taper Turning Attachment
- Live Centre
- Indexable Lathe Tools
- Face Plate
- Drill Chuck and Arbor
- Machine Mounts
- 5C Collets and Chuck

* The above specifications are subject to change without prior notice, no liability for mistakes. Machines may be shown with optional equipment.